

General Specifications

DTSX1
Fiber Optic Heat Detector



GS 39J06B35-01E

Outline

The DTSX1 fiber optic heat detector senses temperatures with fiber optic sensor cable and detects high heat over a wide area quickly and precisely.

The DTSX1 is easy to deploy because components such as an optical fiber temperature sensor, relay output, and alarm display are integrated and wired in a single box.

An ability to configure the alarm display and sound individually to suit field conditions applications enables rapid detection, localization, and identification of abnormalities, which increases the cost effectiveness of the system as a whole.

Features

- The DTSX1 utilizes a heat detection function and is easy to handle; components and device configuration are standardized and integrated into a single box.
- The DTSX1 can be operated as a package in conjunction with a fiber optic sensor cable (standard).
- The DTSX1 is dedicated to facility abnormality monitoring and fire detection so it can be deployed timely and economically compared to general-purpose fiber optic temperature sensors.
- An up to 4-channel optical switch module, along with a 16-km measurement distance of the fiber optic sensor cable for each channel enables the precise detection of heat over a wide area.
- Integration with Yokogawa's process control system and safety instrumented system provides a comprehensive production control and safety solution.
- The DTSX1 is compliant with EN54-22 fire detection certification standard (European line-type heat detector standard).

Note: Application for the certification is pending as of 2018.

System Configuration

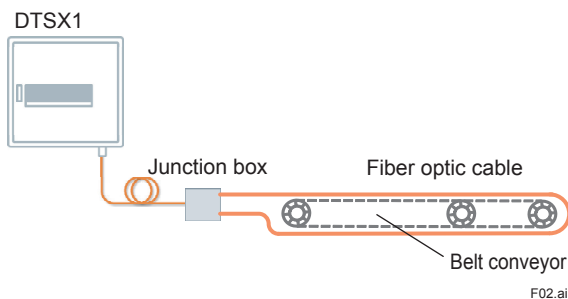


Figure: DTSX1 heat detection system example



F01.ai

Specifications

Item	Description	
Measurement distance range	2, 4, 6, 8, 10, 16 km	
Number of channels	1, 2, 4	
Spatial resolution	1 m or less*1	
Sampling resolution	Measuring temperature at 0.5-meter or 1-meter intervals	
Minimum temperature measurement time	5 sec	
Measurement mode	Single-ended, double-ended	
Number of zones configured	1,000 (no overlapping)	
Interface	Optical output	E2000/APC 50/125 μm GI
	LAN	10BASE-T or 100BASE-TX Modbus/TCP
	Relay output	8, 64 ports, max 35 V / 1 A DC
	Relay input	4 ports ON: 12 to 30 V / 5 mA DC OFF: 3 V / 2 mA DC
	Display*2	POWER SYSTEM OPERATING ALARM/PRE-ALARM/FAULT (Displayed for each channel)
	Switch	RESET
	ACK	Alarm acknowledgement (Hold the alarm state)
Power supply	Voltage	10 to 30 V DC (Rated voltage: 12 to 24 V DC)
	Power consumption	30 W (normally 15 W at 23°C ambient temperature)
Dimensions (W×H×D)	500 mm × 500 mm × 250 mm	
Weight	28 kg	
Mount type	Wall mount	

*1: The length at which a 10% to 90% temperature change is detected at the near end of the fiber optic sensor cable when sampling a 16 km or less range at 0.5 m intervals

*2: Display

Display	Color	Description
POWER	Green ON	Power ON, the power voltage is normal
	Red ON	Power ON, the power voltage is abnormal
	Green flashing	DTSX1 is starting
	OFF	Power OFF
SYSTEM	Green ON	DTSX1 is normal
	Red ON	DTSX1 is abnormal
	OFF	Power OFF
OPERATING	Green ON	Heat detection is operating
	Red ON	Test mode
	OFF	Heat detection is stopped
ALARM	Red ON	Alarm occurred
	OFF	No alarm occurred
PRE-ALARM	Red ON	Pre-alarm occurred
	OFF	No pre-alarm occurred
FAULT	Orange ON	There is a fault in the fiber optic sensor cable
	OFF	There is no fault in the fiber optic sensor cable

● Functional Specifications

Item	Description	
Heat detection	Alarm	Measures the temperature of the detection object with fiber optic sensor cable according to the distance and channel settings and detects heat according to the alarm settings.
	Pre-alarm	Outputs a pre-alarm when reaching a temperature limit. This function is available for the upper temperature limit, average temperature difference upper limit, and temperature rise per time unit.
	Reset	Resets the alarm state regardless of the alarm condition and holds the state until the next alarm.
	ACK	Acknowledges and holds the alarm state.
	Zone data*1 generation	Generates zone data (maximum/minimum/average values) to detect heat from the temperature measurement data.
Setup	Alarm setting*2	Set each alarm for the temperature upper limit, average temperature difference upper limit, and temperature rise per time unit for each zone, along with a preset function to suit each application.
	Zone setting	Set up to 1,000 zones for which to output an alarm.
Interface	Alarm output	Set a programmable alarm output for each relay output.
	Alarm input	Inputs an alarm from other devices via relay. Reset and ACK inputs are possible.
	Alarm display	Displays the alarm when an alarm occurs.
	Communication	Acquires zone data and alarm status via Modbus/TCP.
Maintenance	Fiber optic sensor cable break detection	Detects the break status when the signal level of the fiber optic sensor cable drops and displays the status for each channel. The status can be acquired via Modbus/TCP.
	Power supply voltage monitoring	Monitors the power supply voltage drop and displays the status in the event of an abnormality. The status can be acquired via Modbus/TCP.
	System fault detection	Monitors the system fault status and displays the status in the event of an abnormality. The status can be acquired via Modbus/TCP.
	Self-diagnosis	Self-diagnoses the status of each part of the system via Modbus/TCP or with configuration software.


*1: The temperature data for the zone to detect heat. Zones can be set arbitrarily.

*2: An alarm status is determined by selecting or combining alarm settings from among the three limits. See "Alarm Determination."

● Alarm Determination


• Temperature upper limit

Output an alarm when the maximum value in the zone becomes larger than the threshold.

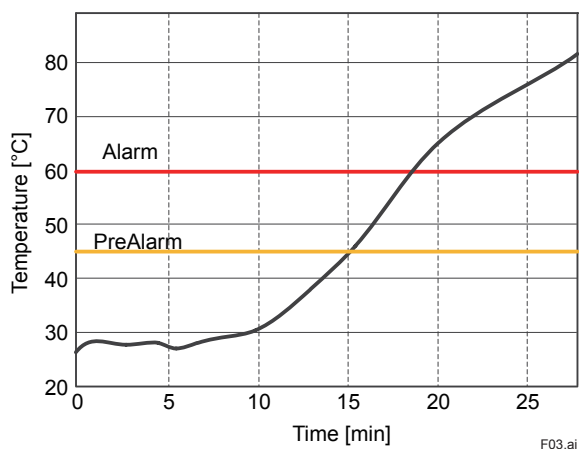


• Average temperature difference upper limit

Output an alarm when the difference between the maximum value and average value in the zone becomes greater than the threshold.


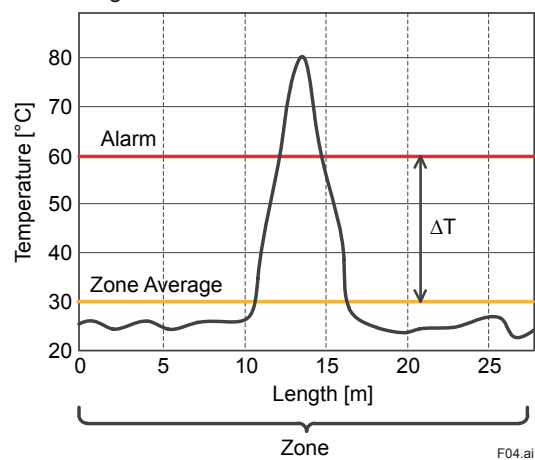


• Temperature rise per time unit

Output an alarm when the rate of rise of the maximum temperature in the zone becomes larger than the threshold.

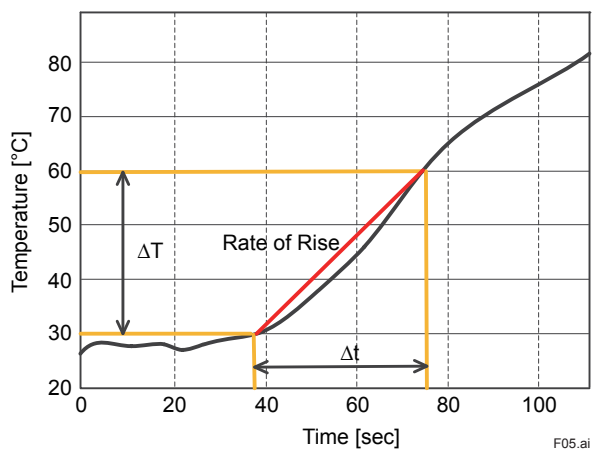

● Fiber Optic Sensor Cable (Note)

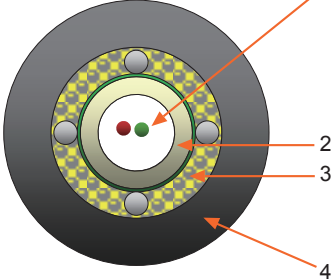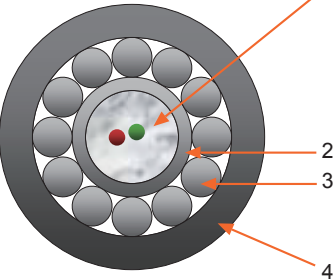Item	Standard type	Robust type
Cross-sectional structure	 <p>1 Optical fiber 2 Loose tube 3 Tensile strength fiber 4 Outer layer</p> <p style="text-align: right;">F06.ai</p>	 <p>1 Optical fiber 2 Stainless tube 3 Tensile strength stainless steel wire 4 Outer layer</p> <p style="text-align: right;">F07.ai</p>
Optical fiber	50/125 μm GI, 2 cores	50/125 μm GI, 2 cores
Outer layer	Flame retardant non-corrosive (FRNC)	Flame retardant non-corrosive (FRNC)
Standard outer diameter	4.5 mm	4.0 mm
Operating temperature range	-40 to 85°C	-25 to 70°C
Allowable tension (short term/ long term)	700 N/200 N	1,000 N/500 N
Minimum bend radius (static/ dynamic)	60 mm/80 mm	60 mm/80 mm
Weight	21 kg/km	46 kg/km
Operating environment/ conditions	Indoors/outdoors	Indoors/outdoors Exposure to crushing and mechanical stress
Type No.	S9550TK	S9560TK

Note: The cables are recommended for use for a fire detection system. Cables provided by other suppliers can also be used to suit your applications provided they are compatible with the optical output specifications of the DTSX1. In order to comply with the fire detection certification (EN54-22) *1, use the standard type fiber optic sensor cable shown in the table above in conjunction with the DTSX1. *1: Application is pending.

■ Installation Requirements

Item	Description
Temperature	Normal operating condition: -20 to 60°C
	Transport/storage condition: -40 to 70°C
Humidity	Normal operating condition: 5 to 95%RH (No condensation)
	Transport/storage condition: 5 to 95%RH (No condensation)
Installation	Indoors
Vibration, shock, impact	Compliant with EN54-22 standard (EN 60068-2-6, 27, 75)
Corrosive gas	Compliant with EN54-22 standard (EN 60068-2-42)
EMI noise	Compliant with EN54-22 standard (EN 50130-4)

■ Software

DTSX3000 Control Visualization Software (DTAP3000)

This software is required for the operation and initial setup of the DTSX1, such as temperature calibration and alarm condition and zone settings. For details, refer to the "DTXL Distributed Temperature Sensor Long Range System (Software)" (GS 39J02B40-01E).


Data Logging Software (GA10)

This software has templates dedicated to the DTSX1 and the custom display function. The GA10 graphically displays the temperature measurement data from the DTSX1. Purchase this software when necessary. For details, refer to the "GA10 Data Logging Software" (GS 04L65B01-01EN).

■ Standard Accessories


Item	Quantity	
Wall mounting bolt	4	
Wall mounting washer	4	
Relay I/O connector	64 relay output	17
	8 relay output	3
Cable hole cover sheet	13	
Door lock key	2	

■ Part Names and Functions

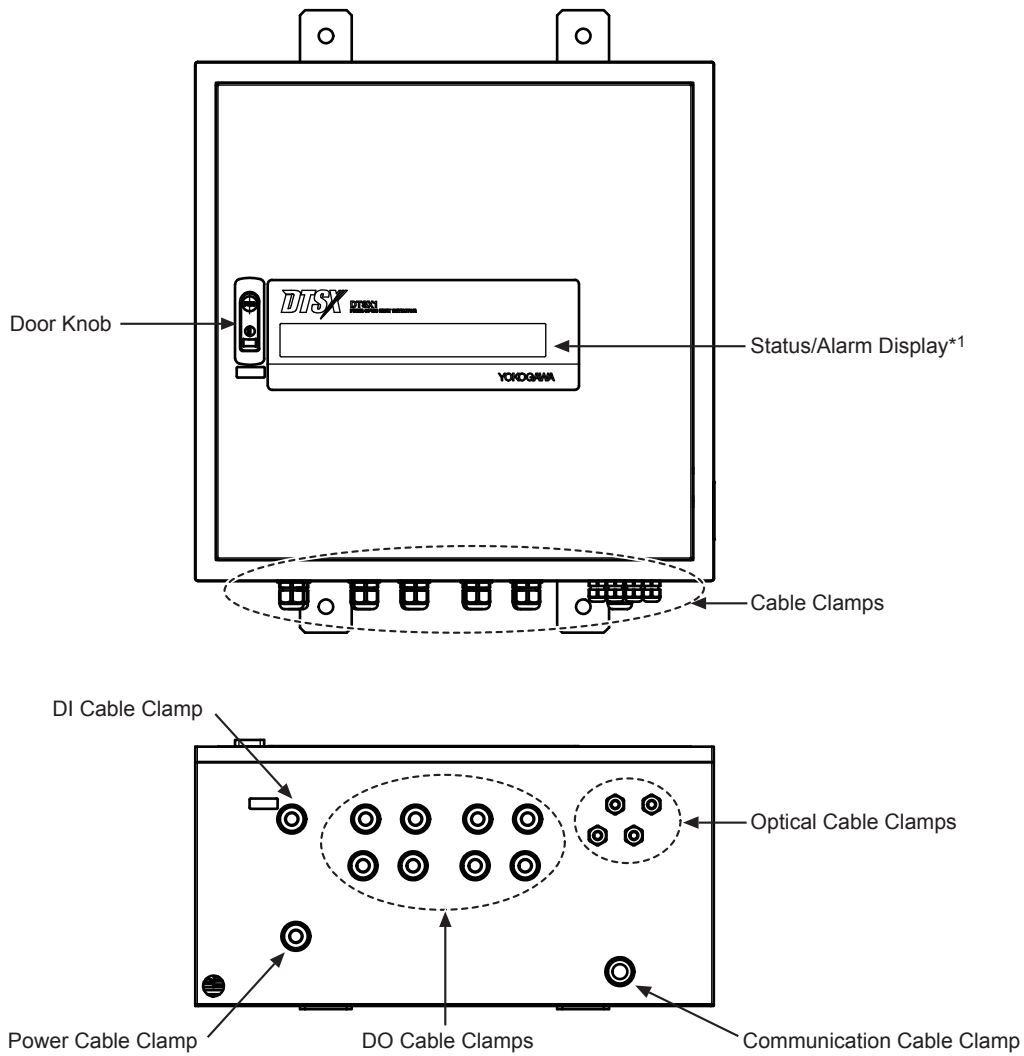


F08.ai

*1: Status/Alarm Display

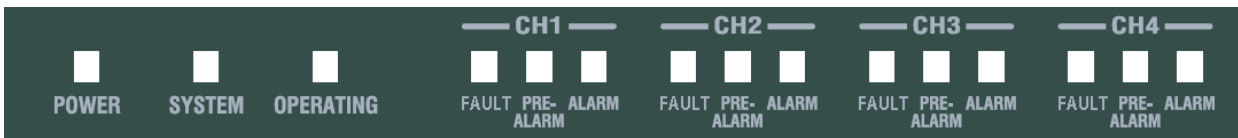

F09.ai

External Dimensions

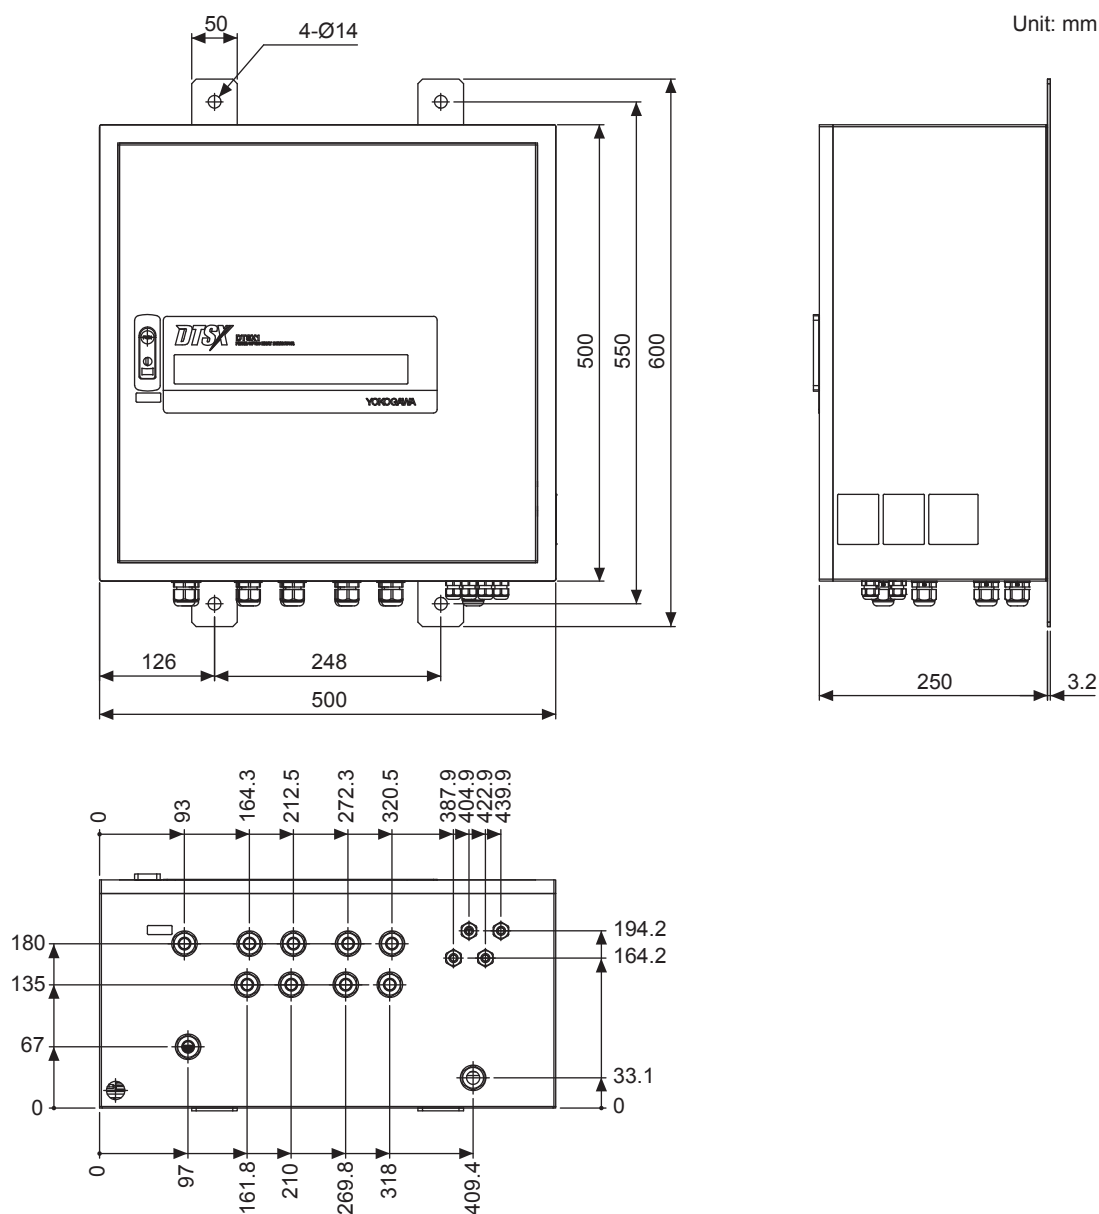

F10.ai

Setup/Adjustment

Software Operating Environment

Item	Requirement*1
OS	Windows 7 SP1 Windows 8.1 Windows 10
CPU	Dual Core 2 GHz or faster processor
RAM	2 GB or more (4 GB or more is recommended)
HD free space	2 GB or more
Ethernet adapter	100BASE-TX or 10BASE-T
.NET Framework	• .NET Framework 4.0 (Windows 7) • .NET Framework 4.51 (Windows 8.1) • .NET Framework 4.6 (Windows 10)
Web browser	Internet Explorer 11
PDF reader*2	Adobe Acrobat Reader DC

*1: Operation is not guaranteed for all PC environments that meet these requirements.

*2: The PDF reader is required to display the Instruction Manual (IM).

■ Precautions on Fiber Optic Sensor Cable

● Connection and Wiring

- When wiring fiber optic sensor cables, the maximum number of connections, including the optical output of the DTSX1, is 20 per channel.
- Fusion splice a fiber optic sensor cable with a 0.1 dB loss or less.
If connector connection is unavoidable, use an APC connector to contain the loss to 0.5 dB or less.
- For more detailed information on connection and wiring of the power cable, contact I/O cables, network cables, and fiber optic sensor cables, refer to the "DTSX1 Optic Fiber Heat Detector Installation, Configuration and Operation Guide" (IM 39J06B35-01E).

● Handling

- Use the optical connector and fiber optic sensor cable specified in the product specifications.
- Clean the optical connector end to remove foreign substances such as dirt, dust, and oil film before connecting it.
- Check that there is no scratch at the optical connector end. If an optical connector with a scratch at the end is used, the mating optical connector may be damaged.
- Check that the optical connector is connected and locked securely.
- Wire fiber optic sensor cables properly according to the prescribed instructions and do not apply external forces such as excessive tension or side pressure or excessive bending or twisting.

■ Model and Suffix Codes

● DTSX1

Model	Suffix code			Remark*1
DTSX1	-N			Fiber optic heat detector
Measurement distance range		02		2 km
		04		4 km
		06		6 km
		08		8 km
		10		10 km
		16		16 km
Number of channels		1		1 channel
		2		2 channels
		4		4 channels
Relay output		08		8 ports
		64		64 ports

*1: The measurement distance range for the fire detection certification (EN54-22) is 10 km or less.

● Fiber Optic Sensor Cable

Type	Model/parts	Cable length
Standard	S9552TK	2 km
	S9554TK	4 km
	S9556TK	6 km
	S9558TK	8 km
Robust	S9562TK	2 km
	S9564TK	4 km
	S9566TK	6 km
	S9568TK	8 km

■ Compliant Standards

Category		Standard	Remark
Fire detection		EN54-22*1	Heat response class: A1N, A2N, BN Environmental group: II Maximum sensing element length: 10 km
Laser safety		IEC 60825-1	Class 1M
		EN 60825-1	Class 1M
		FDA(CDRH)	21CFR Part 1040.10
CE mark*2	EMC	EN 55011 EN 61000-6-2	Class A Group 1*3
	General safety*4	EN 61010-1	–
		EN 61010-2-201	–
	RoHS Directive	EN 50581	–
	Laser safety	EN 60825-1	Class 1M
CSA mark	General safety*4	CSA C22.2	No.61010-1-12 No.61010-2-201:14
KC mark	EMC	Korean EMC standards	–
RCM mark	EMC	EN 55011	Class A Group 1

*1: Application for fire detection certification (EN54-22) is pending.

*2: The manufacturer and the authorized sales representative in Europe are shown below according to the EU's laws and regulations.

Manufacturer: Yokogawa Electric Corporation (9-32, Nakacho 2-chome, Musashino-shi, Tokyo, Japan 180-8750)

Authorized sales representative in Europe: Yokogawa Europe B.V. (Euroweg 2, 3825 HD Amersfoort, the Netherlands)

*3: Class A compliant devices are designed for an industrial environment and cannot be used for any other purposes.

*4: In order to make the DTSX1 compliant with the standard, a dedicated breaker compliant with the following standards must be installed on the power supply side.

CSA: CSA C22.2 No.5 or UL489

CE Marking: EN 60947-1 and EN 60947-3

Note: Waste Electrical and Electronic Equipment (WEEE) Directive

This is a directive governed by the EU's environmental regulations. The DTSX1 is designed to comply with the requirements for large industrial equipment among the equipment categories controlled by the WEEE Directive.

■ Ordering Information

When ordering, specify the model, suffix codes, and optional codes.

■ Trademarks

- DTXS is a registered trademark of Yokogawa Electric Corporation.
- Ethernet is a trademark of Xerox Corporation in the United States.
- Microsoft and Windows are registered trademarks or trademarks in Microsoft Corporation in the United States and/or other countries.
- Modbus is a registered trademark of AEG Schneider Automation Inc.
- E2000 is a trademark of Diamond SA in Switzerland.
- Other company names and product names used in this document are registered trademarks or trademarks of Yokogawa or their respective holders.
- The TM and ® marks for the registered trademarks and trademarks are not displayed in this document.