

Instructions


The Crisis Type B is not supplied with a backbox as it can be used with any “MK” style double backbox over 25mm deep. To accept cable glands the backbox needs to be 35mm deep including metal clad surface types and plastic plasterboard liner boxes.

The unit should be mounted at a height of 900mm to 1200mm from the centre line to the finished floor level to comply with the requirements of Building Regulations Document M (Access for the Disabled).

When flush mounting use the backbox manufacturers recommended cut out.

Once the outstation is mounted, the supplied sign should be placed adjacent to the outstation to give instructions and identify the point.

Crisis Type B

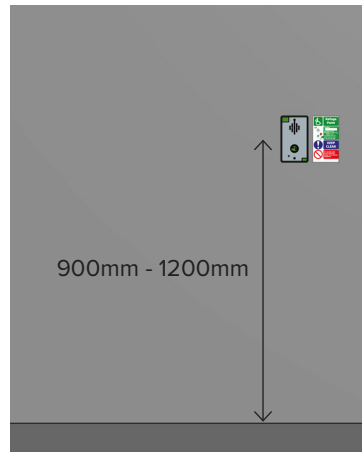

+44 (0)1329 835024 

technical@eurofyre.co.uk 

www.eurofyre.co.uk 

Manufactured in the UK

Eurofyre Limited, Unit C1 Knowle Village Business Park, Mayles Lane, Wickham, Hampshire, PO17 5DY, UK

Connections

